

CJV150-75/107/130/160

Affordable, Integrated Printer/Cutter...





SOURCE OF DIGITAL SOLUTIONS

Digital Star Qatar has been leading the digital solution in Doha, for more than 10 years as a supplier and distributers for the digital sector. Our commitment to providing the best quality machinery with advanced technology, which can help your business to expand more with successful outcomes.

The world has enabled us the opportunity to set ultrastandards in signages and digital printing industries. DSQ has developed into a true trendsetter and a reliable destination for customers seeking wholesale solutions. We help the sectors like sign makers, digital print houses, POS/POP makers, fit-out companies, event managements, and glass & aluminium fabrication industries. we promise to take your business to stand head.

Best A Grade Quality & Innovative Products



THE CJV150 SERIES DELIVERS...

High-quality printing and sharp, accurate cutting for fresh, brilliant ideas and hundreds of different applications.



CJV150-75

Width: 0.8 m

Suitable for a handy making of stickers and labels

Small-footprint CJV150-75 is suitable for stickers, labels, artistic posters, and point of sales materials.



CJV150-107

Width: 1.1 m

Suitable for quick POPs and large-size posters

The CJV150-107 delivers a quick output while preserving product quality.



CJV150-130

Width: 1.3 m

Suitable for variously sized signage and point-of-sale marketing materials

The wider but modestly-sized CJV150-130 meets variable design demands.



CJV150-160

Width: 1.6 m

Suitable for cost effective production of large, high-quality signage and vehicle wrapping films

The CJV-150-160 has the widest working width among the models, and satisfies a wide range of market demands including quality and cost.





Orange Ink (Faithful colour reproduction)

Newly developed SS21 silver ink is available.
Being 1.67* times brighter than conventional silver inks, SS21 ink adds brilliant and beautiful mirror effects to print results.

*Obtained from comparison measurements of SS21 and ES3 silver inks conducted at the

Mirrocki

Jazz

Ja

Mimaki HQ



AFFORDABLE, HIGH-SPEC, HIGH-PERFORMANCE, INTEGRATED PRINTER/CUTTER

CJV150 Series integrated printer/cutter from Mimaki provides high performance, creativity and versatility with vibrant ink types, including new Silver, Orange and Light Black, in a cost effective package for signmakers, display graphics professionals and printshops

CJV150 series delivers • • •

- Fast printing speeds up to 56.2m2 per hour
- High quality print resolution of up to 1,440dpi
- Four different printing widths: 800mm, 1,090mm, 1,361mm and 1,610mm
- Choice of multiple eco-solvent and dye sub ink sets:
- 10-colour options (SS21) featuring; Silver, Orange, Light Black & White inks
- Vibrant 4- or 6-colour dye sub options (Sb53/Sb54)
- Nozzle Check Unit (NCU) and Nozzle Recovery System (NRS) ensure continuous print operations
- UISS and optional MBIS on board 2 litre bulk ink system
- 3-way intelligent heater


SOLVENT & DYE SUB INKS 4 PRINT WIDTHS AVAILABLE

1,440DPI MAX RESOLUTION 56.2m2/h MAX. SPEED

MAPS3 PRINT ENHANCEMENT FUNCTION

Create ... Metallic stickers, Decals, Die-cut labels, Signage,
Vehicle graphics, Banners, Posters, PoS, Back-lit & Exhibition graphics,
Garment marking, Canvas prints and much more...



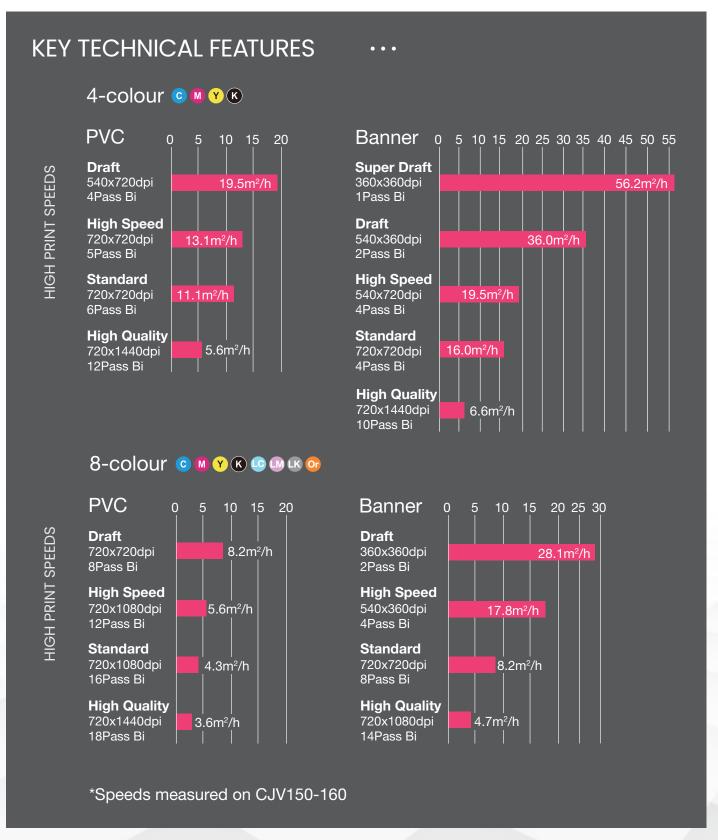

RASTER LINK 5

Intuitive and user-friendly operation

3-layer printing

Enables simultaneous 3-layer printing: e.g. Colour → White → Colour

Sophisticated RIP Software maximizes performance

Web update function is supported:

This facility enables easy program updates and profile downloading to be performed via the internet.




EASE OF USE

Productivity maintenance - NRS*1

The NRS substitutes defective nozzles with non-defective nozzles until the technician arrives. This feature enables uninterrupted print operations and continuous productivity.


- *1 NRS: Nozzle Recovery System
- *2 10 nozzles per nozzle row can be registered.

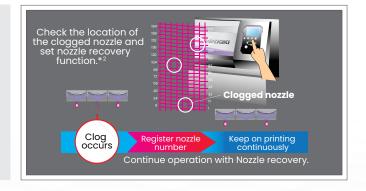

Prevention, print quality problems - NCU*


The CJV150 is equipped with Mimaki's original automatic NCU. Clogged nozzles are automatically detected and cleaned by the NCU. If the clogging is not resolved by cleaning, the CJV150 automatically sets the nozzle recovery function NRS and resumes printing. These functions significantly reduce the waste printing caused by clogged nozzles during a continuous printing run.

* NCU: Nozzle Check Unit

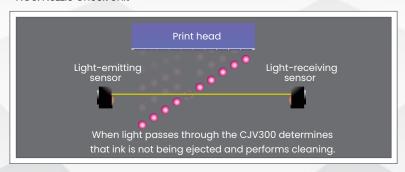

Stable printing using the ink circulation system - MCT*

MCT is a standard feature included to effectively avoid the settling of white and silver pigments in the ink lines by regularly circulating the ink. It prevents print troubles and enables stable output from the start of operation. In addition,



MCT contributes to reduction of ink waste, thereby supporting environmentally and economically friendly applications.

* MCT is only available for white and silver inks.


(MCT = Mimaki Circulation Technology)

HIGH PRODUCTIVITY



Uninterrupted Ink Supply System (UISS)

Utilises two cartridges per colour in 4-colour mode. When one cartridge runs out of ink the system switches automatically to the second cartridge of the same colour, enabling long unattended printing.




When the ink cartridge runs out of ink, the indicator will light up red, while the system already switches automatically to the second cartridge of the same color

3-Way intelligent heater

A 3-way intelligent heater fixes droplets placed on media. By using Mimaki's original technology in heating the media at a controlled temperature, ink can be fixed while maintaining high colour development and high image quality. Thus the CJV150 provides both steady colour development and easy handling after printing.

- Pre-heater: Heats media to the optimum temperature before printing.
- Print heater: Dries ink after it lands on media before it bleeds, improving colour development.
- Post-heater: Enhances ink drying and achieves stable take-up.
- Top blower: Air blower supports drying of ink.



BEAUTIFUL OUTPUT

MAPS3 (Mimaki Advanced Pass System 3)


Reduces banding by dispersing ink drops between passes






Waveform Control Technology

Ensures high quality print resolution, by jetting ink drops in straight lines with almost perfect round dots, delivering clear and sharp letters, lines and edges.



Large ink dot size in high speed mode

Delivers high density print by removing the gap between dots.



VERSATILE PRINT & CUT FUNCTION



The multiple functions of the CJV150 models ensure high-quality printing and highaccuracy cutting enabling the production of labels, stickers and vehicle wraps with ease.

Continuous-register mark-detection function enables continuous media cutting.

The CJV150 automatically detects all register marks set by RasterLink6 on the media, and cuts contour lines precisely by utilising simultaneous automatic calibration.

Print and cut on no-register mark media / Cut and print function

Media up to 1m in length does not require register marks, reducing media wastage.

Segment correction function facilitates precision cutting over longer-length prints.

This function detects intermediate register marks and enables four-point corrections for each segment to ensure accurate contour cutting over longer-length prints, even if the image is distorted.









Over-cut and corner-cut functions ensure clearly cut edges with no residues.

The over-cut function ensures sharply cut edges with no residues by making a cross cut at the start and end positions of the contour cutting. The corner-cut function ensures sharply cut edges by making cross cuts at each corner.

Clamp-pressure automatic-switching function enables continuous operation.

The pressure of the media clamps is automatically optimised for printing and cutting. No pressure adjustment by the operator is required during continuous operation.

"Cut and Print" function improves the workability of thin materials.

This function prevents common problems, such as film separation and faulty cut results, by cutting the media before printing.

Versatile cutting methods satisfy a range of market demands.


as crease lines.

"Half-cut" produces a series of half and die cuts, leaving a few connection points that retain the printed image on the medium. "Die cut" completely cuts the printed image from the medium. "Perforation cut" is useful





Product Samples















Specification

| | CJV150-75 | CJV150-107 | CJV150-130 | CJV150-160 | |
|------------------------|---|-------------------------------------|---|--------------------------|--|
| Print Head | On-demand piezo head | | | | |
| Print Resolution | 360 dpi, 540dpi, 720dpi, 1080dpi, 1440dpi | | | | |
| Maximum print width | 800mm | 1,090mm | 1,361mm | 1,610mm | |
| Maximum media width | 810mm | 1,100mm | 1,371mm | 1,620mm | |
| | | Solvent Ink | Solvent Ink | | |
| | | SS21 (C, M,Y, K, Lc, I | SS21 (C, M,Y, K, Lc, Lm, Lk, or W, Si) | | |
| | | ES3 (C, M,Y, K, Lc, L | ES3 (C, M,Y, K, Lc, Lm) | | |
| | Type/ Color | BS3 (C, M,Y, K) | BS3 (C, M,Y, K) | | |
| | | BS4 (C, M,Y, K) | BS4 (C, M,Y, K) | | |
| | | Water-based su | Water-based sublimation ink | | |
| | | Sb53 (BI, M, Y, K, D | Sb53 (BI, M, Y, K, DK, Lb, Lm) | | |
| | Sb54 (BI, M, Y, K) | | | | |
| Ink | | SS21: 440ml Ink Co | artridge/2L ink pack* (W | / & Si: 220ml Cartidge) | |
| | | ES3: 440ml ink Co | ES3: 440ml ink Cartridge | | |
| | Package Size | BS3: 600ml Ink Pack/ 2L Ink pack* | | | |
| | | BS4: 600ml Ink pack/ 2L Ink pack* | | | |
| | | Sb54: 2L Ink pack* | | | |
| | Circulation System | MCT (Mimaki Circulation Technology) | | | |
| | Oli Galatio 11 Gyoto 111 | (Only applies to v | (Only applies to white and silver inks) | | |
| Media thickness | 1.0mm or less | | | | |
| Rolled media weight | 40kg or less | | | | |
| Certifications | VCCI class A / FCC class A / ETL UL 60950 | | | | |
| | CE Marking (EMC, Low voltage, and Machinery directive) / CB | | | | |
| | RoHS / REACH and Energy Star / RCM | | | | |
| Interface | USB 2.0, for E-mail notifi cation function | | | | |
| Power supply | Single-phase (AC 100-20V / AC 220-240V) | | | | |
| Power consumption | 100V: 1.44 kVA × 1 or less, 200V: 1.92 kVA × 1 or less | | | | |
| Oper. environment | Temperature: 2 | 20-30 C (59-86 F), Hu | midity: 35–65% Rh (No | n condensing) | |
| Dimensions (W × D × H) | 1,965 × 700 × 1,392mm | 2,255 × 700 × 1,392mm | 2,525 × 700 × 1,392mm | 2,775 × 700 × 1,392mm | |
| Weight | 126kg | 142kg | 157kg | 168kg | |

^{*}Specifications are subject to change without prior notice, all rights reserved

Supplies

| Item | Colour | | | |
|------|---------------|-------------|---------------------|--|
| ES3 | Cyan | SPC-0440C | 440ml Ink cartridge | |
| | Magenta | SPC-0440M | | |
| | Yellow | SPC-0440Y | | |
| | Black | SPC-0440K | | |
| | Light Cyan | SPC-0440LC | | |
| | Light Magenta | SPC-0440LM | | |
| | Cyan | SPC-0501C | | |
| | Magenta | SPC-0501M | | |
| | Yellow | SPC-0501Y | | |
| | Black | SPC-0501K | 440ml Ink cartridge | |
| | Light Cyan | SPC-0501LC | 440mmmk carmage | |
| | Light Magenta | SPC-0501LM | | |
| | Orange | SPC-0501Or | | |
| | Light Black | SPC-0501Lk | | |
| SS21 | White | SPC-0504W-2 | 220ml Ink cartridge | |
| 3321 | Silver | SPC-0504Si | 220ml Ink cartridge | |
| | Cyan | SPC-0588C | | |
| | Magenta | SPC-0588M | | |
| | Yellow | SPC-0588Y | 2,000ml Ink pack | |
| | Black | SPC-0588K | | |
| | Light Cyan | SPC-0588LC | | |
| | Light Magenta | SPC-0588LM | | |
| | Orange | SPC-0588Or | | |
| | Light Black | SPC-0588Lk | | |

| Item | Colour | 600ml Ink pack | 2,000ml Ink pack |
|------|---------|----------------|------------------|
| | Cyan | SPC-0667C | SPC-0693C |
| BS3 | Magenta | SPC-0667M | SPC-0693M |
| БЭЭ | Yellow | SPC-0667Y | SPC-0693Y |
| | Black | SPC-0667K | SPC-0693K |
| | Cyan | BS4-C-60 | BS4-C-2L |
| BS4 | Magenta | BS4-M-60 | BS4-M-2L |
| D34 | Yellow | BS4-Y-60 | BS4-Y-2L |
| | Black | BS4-K-60 | BS4-K-2L |

| Item | Colour | 440ml Ink cartridge | 2,000ml Ink pack |
|------|---------------|---------------------|------------------|
| | Blue | SB53-BL-44 | SB53-BL-2L |
| | Magenta | SB53-M-44 | SB53-M-2L |
| | Yellow | SB53-Y-44 | SB53-Y-2L |
| Sb53 | Black | SB53-K-44 | SB53-K-2L |
| | Deep Black | SB53-DK-44 | SB53-DK-2L |
| | Light Blue | SB53-LBL-44 | SB53-LBL-2L |
| | Light Magenta | SB53-LM-44 | SB53-LM-2L |
| | Blue | | SB54-BLT-2L |
| Sb54 | Magenta | | SB54-MT-2L |
| 3004 | Yellow | | SB54-YT-2L |
| Leg | Black | | SB54-KT-2L |
| | | | |

^{*1:} White and silver are provided in 220ml lnk cartridge only.
*2: Optional MBIS (Mimaki Bulk lnk System3) is required for using 2L lnk pack.



SYSTEM REQUIREMENTS (PC's)

| Operating System* | Windows 10 (64 Bit) or Later |
|-----------------------------|--|
| Processor | i7 - 2.6 GHz or faster |
| Memory (RAM) | Min. 8GB or More |
| Video Card and Monitor(VGA) | 1280x1024 or Higher Resolution is Recommended |
| Working Hard Disk Space | 1 TB SSD or more recommended |
| Graphics Card | 2GB or more (Optional) |
| Optical drive | DVD-ROM |
| Other requirements | Ethernet connection for network capable printers |
| | Available USB ports and PCIE Slot |
| Recommended Brand | Lenovo / Dell |

^{*} Note: You can use a laptop or desktop computer

POWER REQUIREMENTS

| Voltage Regulator | 5000W Stabilizer |
|-------------------|------------------|
|-------------------|------------------|

CJV150 Series CJV150-75/107/130/160



^{*} Use the original operating system and software. If you are using pirated operating system or software, we are not responsible for any damage to Machine workings, and also the warranty terms will become void.



Terms and Conditions

- 01. Payment to be made in QR currency.
- 02. Payment Terms: As mentioned in Quotation.
- 03. Bank Charges: Any bank charges relevant to the above transactions will be to your account.
- 04. Any charges, duties, taxes or levies at the ports of entry will be to our account.
- 05. The charges of loading, boarding and local conveyance of the technician will be to our account.
- 06. Any required electrical, mechanical and civil site preparation should be done by the customer according to our engineer's requirements.
- 07. Digital Star Qatar will not be held responsible for delays caused by any damage in the equipment due to shipment, unloading accidents and any related reasons, which is beyond our control.
- 08. The warranty will be 12 months from the date of installation from Digital Star Qatar. Wear and tear, consumables are exempted and warranty can be claimed only if you use the Inks and Services from Digital Star Qatar.
- 09. Service will be free of cost within 12 months from the date of installation.
- 10. Any claim will be invoice directly to you then we will send for claiming procedure which will take 45-60 days, if the claim got approved credit note will issued directly.
- 11. Delivery: As mentioned in quotation

DIGITAL STAR QATAR دیجیتال ستار قبطیر

DOHA | QATAR | P O BOX: 47663



+974 448 34 486



info@digitalstarq.com



+974 441 63 788

